

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/008090 A2

(51) International Patent Classification⁷: **F16D**

(21) International Application Number:
PCT/US2004/021916

(22) International Filing Date: 9 July 2004 (09.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/485,960 10 July 2003 (10.07.2003) US

(71) Applicant and

(72) Inventor: MAZZIOTTI, Phillip, J. [US/US]; 2826 Fal-
mouth Road, Toledo, OH 43615 (US).

(74) Agents: PURDUE, David, C. et al.; Purdue Law Offices,
2735 N Holland-Sylvania Road, Suite B-2, Toledo, OH
43615-1844 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: JOINT SEAL

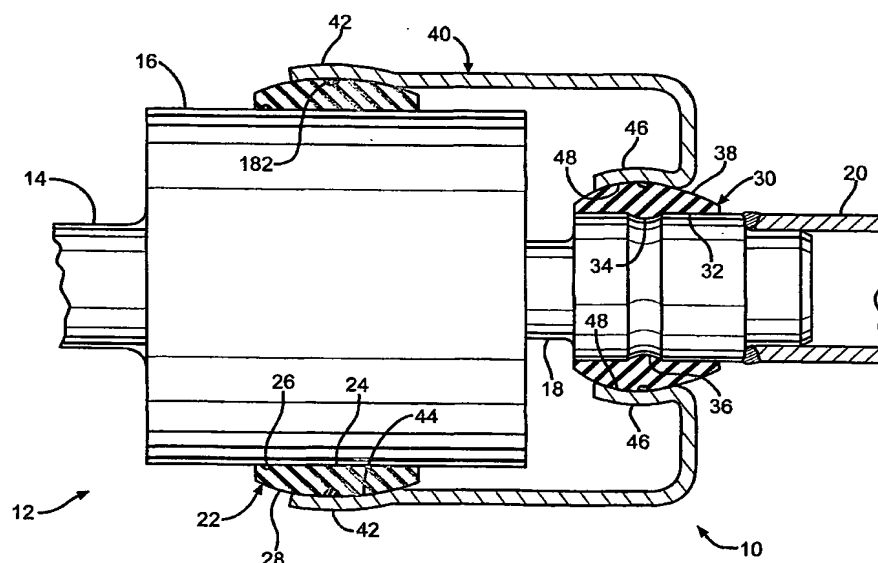

(57) Abstract: A joint seal for torque transmitting joints is disclosed. The joint seal comprises a first seal ring, a second seal ring and a non-flexible seal housing having first and second ends. The first end of the seal housing includes a ring seal surface for engaging and sealing against an outer sealing surface on the first seal ring. The first ring seal includes an inner sealing surface for engaging and sealing against an outer surface of an outer race or some other component associated with a driven shaft of the joint. The second end of the non-flexing seal housing includes a ring seal surface for engaging and sealing against an outer sealing surface on the second seal ring. The second seal ring includes an inner sealing surface for engaging and providing a sliding seal against a driving shaft or some other component associated with a driving shaft of the joint.